



# WISP

Pilots Manual







## CONTENTS

<b>Thank You</b>	01		
<b>Warning</b>	02		
<b>Team Ozone</b>	03		
<b>Your Wisp</b>	04	<b>Advanced Flying Techniques</b>	14
Rucksack	05	Big ears	14
Brake lines	05	B line stall	14
Risers	05	Spiral dives	15
Total weight in flight	06	C riser control	16
Towing	06	Accelerator	16
Limitations	06	<b>Incidents</b>	17
<b>Preparation</b>	07	Deflations	17
Trimmers	07	Cravats	18
Harness	07	Parachutal stall	18
Reserve parachute	07	<b>Caring For Your wing</b>	19
Harness	08	Packing	19
Wing	08	Caring Tips	22
<b>Basic Flight Techniques</b>	10	Storage and transport	23
Launching	10	Cleaning	23
Speed to fly	11	Repairs	23
Turning	11	Maintenance checks	24
Active flying	12	Modifications	25
Landing	13	<b>Ozone Quality</b>	26
		Summary	26
		<b>Technical Specifications</b>	27
		Drawing/Riser lengths	28
		Line diagram	29
		Link Lites	30
		Materials	32

## THANK YOU

**T**hank you for choosing to fly Ozone. As a team of free flying enthusiasts, competitors and adventurers, Ozone's mission is to build agile paragliders of the highest quality with cutting edge designs, performance and maximum security.

Confidence and belief in your paraglider is a far greater asset than any small gains in performance - ask any of the Ozone pilots on your local hills, or those who have taken our gliders on ground-breaking adventures or stood on podiums around the world. All our research and development is concentrated on creating the best handling/ performance characteristics possible with optimum security. Our development team is based in the south of France. This area - which includes the sites of Gourdon, Monaco and Col de Bleyne - guarantees us more than 300 flyable days per year, this is a great asset in the development of the Ozone range.

As pilots we fully understand just how big an investment a new paraglider is. We know that quality and value for money are essential considerations when choosing a new wing, so to keep costs low and quality high we manufacture all of our products in our own production facility. During production our wings undergo numerous rigorous quality control checks that are fully traceable, this way we can guarantee that all of our paragliders meet the same high standards.

It is essential that you read this manual before flying your wing for the first time. The manual will help you get the most out of your new wing, it details information about the design, tips and advice on how best to use it and how to care for your wing to ensure it has a long life and retains a high resale value. For the latest updates, including all technical data please refer to the online version. This can be found on the product's page on at [www.flyozone.com](http://www.flyozone.com)

If you need any further information about any of our products please check [flyozone.com](http://flyozone.com) or contact your local dealer, school or any of us here at Ozone.

Safe Flying!  
Team Ozone

## WARNING

- Paragliding is a potentially dangerous sport that can cause serious injury including bodily harm, paralysis and death. Flying an Ozone paraglider is undertaken with the full knowledge that paragliding involves such risks.
- As the owner of an Ozone paraglider you take exclusive responsibility for all risks associated with its use. Inappropriate use and or abuse of your equipment will increase these risks.
- Any liability claims resulting from use of this product towards the manufacturer, distributor or dealers are excluded.
- Be prepared to practice as much as you can - especially ground handling, as this is a critical aspect of paragliding. Poor control while on the ground is one of the most common causes of accidents.
- Be ready to continue your learning by attending advanced courses to follow the evolution of our sport, as techniques and materials keep improving.
- Use only certified paragliders, harnesses with protector and reserve parachutes that are free from modification, and use them only within their certified weight ranges. Please remember that flying a glider outside its certified configuration may jeopardise any insurance (e.g. liability, life etc) you have. It is your responsibility as the pilot to verify your insurance cover.
- Make sure you complete a thorough daily and pre-flight inspection of all of your equipment. Never attempt flying with unsuitable or damaged equipment.
- Always wear a helmet, gloves and boots.
- All pilots should have the appropriate level of license for their respective country and third party insurance.
- Make sure that you are physically and mentally healthy before flying.
- Choose the correct wing, harness and conditions for your level of experience.
- Pay special attention to the terrain you will be flying and the weather conditions before you launch. If you are unsure do not fly, and always add a large safety margin to all your decisions.
- NEVER fly your glider in rain, snow, strong wind, turbulent weather conditions or clouds.
- If you use good, safe judgment you will enjoy many years of paragliding.

Remember, PLEASURE is the reason for our sport

## TEAM OZONE

Everyone at Ozone continues to be driven by our passion for flying, our love of adventure and our quest to see Ozone's paraglider development create better, safer and more versatile paragliders.

The design team consists of David Dagault, Luc Armant, Fred Pieri, Russell Ogden, Honorin Hamard and Sam Jobard. Dav started flying when he was 12 years old and has accumulated a wealth of experience in competition flying, XC and paraglider design. Luc, a dedicated XC and competition addict has a background in naval architecture. Fred, our resident geek is a mathematician, mechanical engineer and vol Biv specialist. Russ is a competition pilot and test pilot with 1000s of hours testing experience. World and European champion Honorin is a naturally talented pilot who has been flying since he was 13 years old. Sam designs and develops our range of harnesses, he has a great deal of experience both flying paragliders and designing harnesses. Between them, they bring a wealth of knowledge, ideas and experience and work closely together in the design, development and testing process.

Mike Cavanagh is the boss and multiple winner of the UK XC league, when not out flying he generally keeps control of the mayhem. He is helped by Jean Christophe Skiera (JC) who manages our distribution network and the product range. Promotion and marketing are co-ordinated by BASE jumping legend Matt Gerdes.

Back in the office Karine Marconi, Chloe Vila and Isabelle Martinez run the show. These wonderful ladies look after the ordering system, the dealers, the design team and the general day to day running of the company - without them it would be chaos.

Our own manufacturing facility in Vietnam is headed up by Dr Dave Pilkington who works relentlessly manufacturing gliders and producing prototypes as well as researching materials and manufacturing processes for our future products. He is backed up by a superb team managed by Khanh and Phong with over 1000 production staff.

## YOUR WISP

The Wisp is a lightweight tandem, perfect for mountain hike and fly adventures with a friend. It is a fun, agile and easy-to-use tandem with the weight and pack volume of a solo wing.

Fifteen years of lightweight R&D has allowed us to apply some exciting new construction and design techniques to our range of lightweight wings, including the Wisp. It also benefits from many of the technologies found in our high-performance adventure wings. The Wisp uses a combination of the well-proven Dominico 20D and Porcher Skytex 27gr cloth along with the innovative construction techniques to create an exciting ultra-light wing with maximum levels of passive safety. Currently, it is the lightest certified double surface tandem wing.

With an optimised cell-count and carefully chosen profile, the Wisp is aerodynamically clean and structurally stable. The reduced sail drag, optimised line layout, and low overall line consumption all combine to increase performance without compromising safety and ease of use.

The Wisp benefits from our R&D Team's vast experience of professional tandem flying. Launching is a critical part of every flight, especially during tandem flights and especially on less-than-ideal mountain take off locations. The Wisp is easy and low stress to launch, it inflates smoothly without hanging back, even in zero wind conditions. In stronger winds it rises progressively without the tendency to overshoot. The risers are simple, colour coded, and uncluttered. The lightweight riser option feature an innovative trimmer system that can be adjusted in the air to suit conditions and wing loading.

In the air, low sail weight keeps inertia to a minimum, making the wing both pitch stable and agile. The controls are relatively light, with direct handling requiring minimal effort. The handling is fun and responsive - turns are easy to initiate and the wing maintains bank angles whilst thermalling with minimal input. Due to the planform and sail tension, the Wisp has a very compact feel in the air, absorbing turbulence and transmitting information in a cohesive, understandable, and confidence-inspiring manner.

Weighing in at just 4.33kgs\*, the Wisp is a full-size 38m<sup>2</sup> tandem with the pack volume and weight of a solo wing. The hike is now as pleasurable as the flight - sharing the joy of alpine hike and fly paragliding adventures with your favourite people is now easier than ever.

\*Light riser option.

### **Rucksack**

Your wing is supplied with a specially designed bag that is light in weight and comfortable. It features a padded hip belt, adjustable ergonomic shoulder straps and extra pockets to store keys, accessories and all those extra bits. Its large volume allows you to store all of your equipment whilst distributing the weight for comfortable hiking.

### **Brake Lines**

The brake line lengths have been set carefully during testing. We feel it is better to have slightly long brake lines and to fly with a wrap (one turn of line around the hand). However, if you do choose to adjust their length please keep in mind the following:

- Ensure both main brake lines are of equal length.
- If a brake handle has been removed, check that its line is routed through the pulley when it is replaced.
- When the brakes are fully released in flight, the brake lines should be slack. There must be a substantial bow in them to guarantee no deformation of the trailing edge when accelerated.
- There must be a minimum of 10cm of free play before the brakes begin to deform the trailing edge. This prevents the trailing edge from being deformed when using the speed system.

### **Risers**

Both standard and lightweight risers are available for the Wisp. There are 3 risers per side, the A risers are covered with coloured webbing for easy identification and split into two - the smaller riser, holding only the outermost A line, is for an easier application of big ears simple.

Lightweight Amsteel Dyneema Link Lite connectors replace standard metal maillons, not only do they save weight but they are also incredibly strong with a breaking load in excess of 1000kgs.

The risers feature certified trimmers to adjust the trim speed according to the wing loading and pilot's preference. Lightweight risers feature an innovative trimmer system to control the trim speed of the wing.

**IMPORTANT**  
**In the unlikely event of a brake line snapping in flight, or a handle becoming detached, the glider can be flown by gently pulling the rear risers (C-risers) for directional control.**

### **Total Weight in flight**

Each Ozone glider has been certified for a defined weight range. We strongly recommend that you respect these weight ranges. Flying at the upper limit of the weight range will give a faster speed, harder more precise handling and more dynamic reactions. Flying near the lower weight will give improved sink rate performance, lighter brake pressure and less dynamic handling.

### **Limitations**

The Wisp has been designed as an intermediate lightweight tandem, however it is also suitable for heavier experienced solo pilots who do not fit within the certified range of a standard XL sized wing. It is not intended for beginner pilots.

Before flying tandem it is essential that you are a competent and experienced solo pilot with the appropriate training and qualifications necessary for your region. Taking passengers for a paragliding flight is a huge responsibility and not one to be taken lightly. It is important, especially if the passenger is new to the sport, that they receive a thorough pre flight briefing so that they are aware of all the possible incidents that may occur during the launch/flight/landing process and how to react to them correctly.

The Wisp is not intended for aerobatics. A specific standard of certification for aerobatic flying has not been set up yet, Ozone wings although designed to the highest specifications are not certified for this type of flying. Aerobatic manoeuvres such as wingovers are very difficult and complex to perform correctly and put abnormal stresses on the glider and can lead to loss of control.

The wing was certified without the use of collapse lines and therefore can be used for SIV as normal. We strongly recommend expert tuition over water with all the necessary safety precautions in place. Ensure that you fully understand the correct and safe use of this equipment before attempting SIV.

### **Towing**

The Wisp may be tow-launched. It is the pilot's responsibility to use suitable harness attachments and release mechanisms and to ensure that they are correctly trained on the equipment and system employed. All tow pilots should be qualified to tow, use a qualified tow operator with proper, certified equipment, and make sure all towing regulations are observed. When towing you must be certain that the paraglider is completely over your head before you start. In each case, the maximum tow force needs to correspond to the all up weight of the pilot and passenger.

## PREPARATION

### **Trimmers**

The Wisp is certified with trimmer risers to adjust the trim speed to personal taste depending on the wing loading and conditions.

On the standard risers, the trimmers have a stitched white line to represent 'standard trim'. This is the trim we recommend for launching, landing and 'normal' flight. The lightweight risers feature an innovative trimmer system, the 'standard trim' position is when the black mark enters the splice. To release the trimmers and accelerate the wing, pull the red toggles, to slow the wing pull the black toggles.

Before inflating the wing to take off, ensure the trimmers are set equally on both sides.

### **Spreader bars**

Your Wisp comes with a choice of Ozone spreader bars: Standard, Soft or Light.

Standard spreaders are rigid and incorporate the Ear Blocker Big Ears system. Make sure that you attach the spreader bars to the correct side; the spreader marked with an L is for the left side and the spreader marked with an R is for the right side. Ensure that the ear stopper ball is located facing to the outside. The standard spreader bar has a single hang point (coloured Grey) at one end and twin hang points (coloured Blue) at the other. The single loop (Grey) is for the attachment of the pilot's harness. The twin loops (Blue) are for the passenger's harness, either the upper or lower loop can be used depending on the size and weight of the passenger, but always ensure the passenger is hooked into matching loops on both sides. The loop in the centre of the spreader bar (coloured Red) is for attaching the spreaders to the glider's risers. The spreader bars should be attached to the risers of the glider with a tandem rated trapezoidal links. The single loops (Grey) should be facing to the rear for the pilot to clip into. If you use karabiners instead of trapezoidal links you must make sure that they are tandem rated.

Soft spreaders have trimmers to adjust the pilot's height relative to the passenger. The pilot hang points are coloured black, the passenger's blue and the main hangpoints red.

Light spreaders weigh just 60g. The pilot hang points are coloured black, the passenger's grey and the main hangpoints black.

### **Reserve Parachute**

We recommend that you always fly your tandem with a reserve parachute suitable for your maximum all up flying weight. A twin bridle reserve should be used; each bridle should be attached to the main suspension point on the spreader with a separate carabiner (not supplied). The bridles should be threaded through the Velcro loop and under the protective black cloth flap, before clipping into the carabiner on the main suspension point.

### **Harness**

For the pilot, we recommend a dedicated tandem harness that allows freedom of movement with a wide seat plate to comfortably accommodate the passenger once in the air. The reserve parachute handle should be inaccessible to the passenger to reduce the likelihood of an accidental deployment.

It is important to set up your and your passenger's harness correctly before flying. Make sure to spend time adjusting the harness's settings until you are completely comfortable. The chest strap should be set between 44cm and 48cm between the centre of the hang points.

### **Wing**

To prepare the wing, lay it out on the top surface and perform a thorough daily check. You should inspect the top and bottom surfaces for any rips and tears or any other obvious signs of damage. Lay out the lines one side at a time, hold up the risers and starting with the brake lines, pull all lines clear. Repeat with the stabilo, D (uppers), C, B and A lines, laying the checked lines on top of the previous set, and making sure no lines are tangled, knotted or snagged. Mirror the process on the other side and then inspect the lines for any visual damage. Then inspect the risers for any signs of obvious damage. The general rule is if it looks OK then it is OK, however if you have any doubts please get advice from experienced pilots or your local dealer or instructor.

To familiarise yourself with the glider it is a good idea to perform practice inflations and small flights on a training hill. This will enable you to set up your equipment correctly.

### **Take-off checklist (for both pilot and passenger):**

- Check reserve parachute - pin is in and handle secure
- Helmets on and fastened
- All harness buckles closed - check leg-loops again, triple check passenger
- Karabiners and maillons correctly placed on spreaders and done up tight
- Trimmers set equally on both sides
- Holding the A risers and your brake handles correctly without twists
- Leading edge open
- Aligned in the middle of the wing and directly into wind
- Airspace and visibility clear

## BASIC FLIGHT TECHNIQUES

### **Launching**

Your wing will launch with either the forward or reverse technique. The wing should be laid out in a pronounced arc, with the centre of the wing higher than the wing tips.

#### **Forward Launch - Nil to Light winds**

When the wind is favourable, whilst gently holding the A risers move forward positively, your lines should become tight within one or two steps and the wing will start to inflate. You should maintain a constant pressure on the risers until the wing is overhead. Do not pull down or push the risers forward excessively, or the leading edge will deform and possibly collapse making taking-off more difficult and potentially dangerous.

Move smoothly throughout the entire launch, there is no need to rush or snatch at it. You should have plenty of time to look up and check your canopy before committing yourself. Once you are happy that the Wisp is inflated correctly, accelerate smoothly off the launch.

#### **Reverse Launch - Light to Strong Winds**

Lay out your wing as you would for the forward launch. However, this time turn to face it, passing one entire set of risers over your head as you turn. Now you can inflate the glider with your body weight and the A-risers. Once the wing is overhead, release the risers, brake gently if necessary, turn and launch.

In stronger winds, be prepared to take a few steps towards the glider as it inflates. This will take some of the energy out of the glider and it will be less likely to overfly you. This reverse-launch technique can be used in surprisingly light winds too.

Practice ground handling as much as possible! Not only is it great fun, but it will give you a much better feel for your wing's flight characteristics. It will also improve your overall enjoyment of flying by giving you the feeling of control and making your launches easier and less stressful.

**IMPORTANT**  
**Never take off with a glider that is not fully inflated or if you are not in control of the pitch/roll of your wing.**

### **Speed to Fly**

Flying at the 'standard trim' setting (white line standard risers, black mark lightweight risers) the Wisp will achieve its 'best glide' speed for still air. You should fly at this speed when gliding or when the air is not excessively sinking.

For better penetration in headwinds and improved glide performance in sinking air, crosswinds or headwinds, you should fly faster by releasing the trimmers. Releasing up to half of the trim range does not degrade the glide angle or stability significantly and will improve your XC flying performance. You will reach the next thermal faster and higher. At full speed - when the trimmers are fully released - the Wisp is stable, however we recommend that you do not fly at full speed close to the ground or in turbulent air.

The sink rate and brake pressure are reduced with the trimmers in the fully slow position, this speed should be used when ridge soaring or thermalling. However if you are flying near the bottom of the weight range it is recommended to keep speed in reserve and not fly with the trimmers set too slow. By applying the brakes approximately 20cm, the Wisp will achieve its minimum-sink rate; this is the speed for best climb and is the speed to use for thermalling, gliding downwind in lifting air or ridge soaring.

Whilst making the landing approach it is recommended to return the trimmers to the 'standard trim' position.

### **Turning**

To familiarize yourself with the Wisp your first turns should be gradual and progressive. To make efficient and coordinated turns with the Wisp first look in the direction you want to go, then lean into it. Your first input for directional change should be weight-shift, followed by the smooth application of the brake until the desired bank angle is achieved. To regulate the speed and radius of the turn, coordinate your weight shift and use the outer brake.

**IMPORTANT**  
**In turbulent conditions return the trimmers to the 'standard trim' position.**

**NOTE**  
**It is recommended to pilot the wing with the rear risers during accelerated flight.**

**IMPORTANT**  
**Never initiate a turn at minimum speed (i.e. with full brakes on) as you could risk entering a spin.**

### Active Flying

To minimize the likelihood of suffering collapses in turbulent conditions, it is essential to use active flying. These are skills that are best learnt by playing with the glider on the ground. Flying with a small amount of brake applied (approx. 20cm) will allow you to feel the feedback from the wing. In turbulent conditions the internal pressure of the wing is constantly changing and only by using a small amount of brake will you feel these changes. The aim of active flying is to maintain a constant pressure through the brakes. If you feel a reduction or loss of pressure apply the brakes until you feel normal pressure again. Once you have normal pressure, raise the hands quickly back to the original position. Avoid flying with continuous amounts of deep brake in rough air as you could inadvertently stall the wing. Always consider your airspeed.

These movements can be symmetric or asymmetric; you may have to apply both brakes or just one. The subtle adjustments will keep the glider flying smoothly and directly above you and dramatically reduce the chances of a collapse. If the glider pitches in front of you, use the brakes to slow it down. Equally, if the glider drops behind you, release the brakes to allow it to speed up. The goal of active flying is to maintain the internal pressure whilst keeping the wing directly overhead.

No pilot and no glider are immune to collapses however active flying will virtually eliminate any tendency to collapse. When the conditions are turbulent, return the trimmers to the white line position and fly actively anticipating the movements of the wing. Always be aware of your altitude and never over-react. We strongly advise you to always keep hold of your brake handles and to not fly in turbulent conditions.

**IMPORTANT**  
**Always keep hold of your brakes. Do not fly in turbulent conditions**

### Landing

The Wisp shows no unusual landing characteristics but as a reminder, here are some tips:

- Always set up for your landing early, give yourself plenty of options and a safe margin for error.
- Once below 30 metres avoid turning tightly as the glider will have to dive to accelerate back to normal flight. If you are at low altitude, or if you hit sink, this could mean you hit the ground harder than necessary.
- Lean forward out of your harness before the actual landing (especially if it's turbulent), with your weight leaning forward against the chest strap, and make sure you and your passenger are ready for the landing and a possible PLF (parachute landing fall).
- Return the trimmers to the white line position and fly hands up for your final descent until you are around 1 metre above the ground (in windy or turbulent conditions you must fly the glider actively all the way). Apply the brakes slowly and progressively to slow the glider down until groundspeed has been reduced to a minimum and you are able to step onto the ground.
- In light winds/zero wind you need a strong, long and progressive flare to bleed off all your excess ground speed. In strong winds your forward speed is already low so you are flaring only to soften the landing. A strong flare may result in the glider climbing upwards and backwards quickly, leaving you in a vulnerable position.
- If the glider does begin to climb, ease off the brakes (10-20cm) - do not put your hands up all the way - then flare again, but more gently this time. Keep the brakes at mid speed, stand up, be ready to run and make sure you brake fully as you arrive on the ground.
- Choose the appropriate approach style in function of the landing area and the conditions.
- In strong winds you need to turn towards the glider the second your feet touch the ground. Once facing the wing pull smoothly and symmetrically down on the brakes to stall the wing. If the glider pulls you, run toward it.
- If the wind is very strong, and you feel you might be dragged, or lifted again, stall the glider with the C risers. This stalls the wing in a very quick and controllable way and will drag you less than if you use the brakes.
- Always land heading into wind!

## ADVANCED FLIGHT TECHNIQUES

Ozone would like to remind you that the following manoeuvres should be learnt under the supervision of a qualified instructor and always used with caution. Never forget that properly analysing the conditions before launch will help avoid the need to use these techniques.

### **Big Ears**

Folding in the wingtips increases the sink rate without radically changing the airspeed. This is useful for staying out of cloud or descending through the lift band of a hill, for example when top landing. To pull big ears, keep hold of your brake handles and take the outermost A-line on each side, then pull out and down (preferably one at a time) until the wingtips fold under. The Outer A line is attached to the Baby A riser, making identification and use of the big ear system easier. The size of the big ears can be adjusted by pulling more line, or reaching higher up the line. Once the big ears are engaged you can further increase the sink rate by releasing the trimmers.

For directional control while using the Big Ears, you should use weight shift.

You may use Big ears for the final landing approach but they should be released before making the final flare. To reopen the ears, release both A lines at the same time. To help reinflation, brake gently one side at a time until tips regain pressure. Avoid deep symmetric applications of the brake as this could accidentally induce a stall.

Whilst it is possible to enter a spiral dive whilst holding in Big Ears, the high forces applied to the lower lines could exceed the breaking strain of the lines leading to equipment failure!

### **B-Line Stall**

B-stall is very physical and is for fast descents in emergency situations only. It is faster, safer and easier to lose altitude with a spiral dive.

To initiate the B-stall, keep the brakes in your hand and take hold of both the B risers, or place your fingers between the lines above the maillons. Pull the B risers firmly, you may need the assistance of your passenger to break the pressure. As you pull the B risers the airflow over the wing is broken, the glider loses its forward speed but remains open with a reduced cord. You can descend at around 6 m/s.

**IMPORTANT**  
Induce Big ears one side at a time

**DO NOT perform spiral dives with Big Ears engaged.**

To exit the B-stall the B risers should be released symmetrically and in one smooth, progressive motion. The glider will resume normal forward flight without further input. Check you have forward flight again before using the brakes.

If you pull too much B-line the glider may horseshoe and move around a lot. If this occurs, slowly release the B risers until the wing stabilises or simply exit the B line stall by immediately releasing the B risers. Do not attempt to maintain a B line stall that is not stable.

### **Spiral Dives**

If you turn your glider in a series of tightening 360's it will enter a spiral dive. This will result in rapid height loss. To initiate a spiral, look and lean in to the direction you want to turn, then smoothly pull down on the inside brake. The Wisp will first turn almost 360 degrees before it drops into the spiral. Once in the spiral you should re-centre your weight shift and apply a little outside brake to keep the outer wing tip pressured and inflated.

Safe descent rates of more than 8m/s (1600 ft/min approx.) are possible in a spiral dive, but at these rates the associated high speeds and G-forces can be disorientating. Always pay particular attention to your altitude. To exit the spiral dive, move your weight shift to the outside whilst smoothly releasing the inside brake. As the Wisp decelerates allow it to continue to turn until enough energy is lost to return to level flight without an excessive climb and surge.

The Wisp shows no tendency to remain stable in a spiral dive, however certain parameters could influence its behaviour including: very tight chest strap settings, total weight in flight outside of the certified weight range, or being in a very deep spiral at a very high sink rate >14m/s. You should always be prepared to pilot the wing out of a spiral dive with opposite weight shift and a smooth application of the brake, the rotational speed will then start to reduce and the glider will resume normal flight. Never attempt to recover from a spiral with hard or quick opposite inputs as this will result in an aggressive climb and surge.

**IMPORTANT**  
The pitching movement on exiting the B stall is small but necessary. We recommend you do not brake the glider until you are sure that the glider is flying properly again.

**IMPORTANT**  
Always be prepared to pilot the wing out of a spiral dive. Use opposite weight shift and apply enough outside brake to stop the wing from spiralling.

### **Active C Riser Control**

When gliding it is possible to pilot the wing with the C risers, this gives an improved feel and control over the wing enabling you to fly actively without using the brakes. Using brakes whilst accelerated causes drag which is not only inefficient but it also reduces the inherent stability of the profile - using the brakes whilst accelerated can actually lead to a collapse. Using the C risers increases the angle of attack evenly across the chord and does not weaken the profile, the direct feel allows you to stop collapses before they happen whilst maintaining a higher speed and higher level of efficiency through turbulence.

To fly with the C risers, keep hold of your brake handles (remove any wraps) and take hold of the C risers. If you see or feel the leading edge lose pressure, you can input to the C risers to help keep the nose open. Be careful to use only small inputs with the C risers, you risk stalling part or all of the wing if you are over enthusiastic. The amount of pressure and size of the input is dependent on the amount of turbulence/loss of pressure, but always be gentle at first.

Be prepared for plenty of practice as this new method may take some time for it to become totally intuitive, efficient and comfortable. This control method is suitable for gliding in good 'normal' air, it does not replace proper active flying on the brakes in strong turbulent conditions. If you are unsure about the air release the C risers, return the glider to the white line trimmer position and fly actively with the brakes.

## INCIDENTS IN FLIGHT

### **Deflations**

Due to the flexible form of a paraglider, turbulence may cause a portion of the wing suddenly to collapse. This can be anything from a small 30% (asymmetric) collapse to a complete (symmetric) collapse.

If you have a collapse, the first thing to do is to control your direction. You should fly away from the ground or obstacles and other pilots. Asymmetric collapses should be controlled by weight shifting away from the collapse and applying enough brake to control your direction. This action alone will be enough for a full recovery of the wing most of the time.

Once a glider is deflated it is effectively a smaller wing, so the wing loading and stall speed are higher. This means the glider will spin or stall with less brake input than normal. In your efforts to stop the glider turning towards the collapsed side of the wing you must be very careful not to stall the side of the wing that is still flying. If you are unable to stop the glider turning without exceeding the stall point then allow the glider to turn whilst you reinflate the collapse.

If you have a deflation which does not spontaneously reinflate, make a long smooth progressive pump on the deflated side. This pumping action should take about 1-2 seconds per pump. Pumping too short and fast will not reinflate the wing and pumping too slow might take the glider close to, or beyond, the stall point.

Symmetrical collapses reinflate without pilot input, however 15 to 20cm of brake applied symmetrically will speed the process. After a symmetric collapse always consider your airspeed. Make sure the glider is not in parachutal stall before making any further inputs.

If the wing collapses in accelerated flight, immediately release the accelerator (if applied), manage the collapse using the same methods described above and then return the trimmers to the white line position.

### Cravats

If the tip of your wing gets stuck in the lines, this is called a 'cravat'. This can make your glider go into a spiral, which is difficult to control. The first solution to get out of this situation is to stabilise the glider into normal flight, i.e get control of your direction and then pull down the stabilo line (CR4 - outside line on the C riser) until the wing tip clears. You must be careful with any brake inputs or you may stall the opposite wing. You can also use strong deep pumps of the brake on the cravated side, when doing so it is important to lean away from the cravat otherwise you risk spinning or deepening the spiral. The aim is to empty the air out of the wing tip, but without spinning. Correctly done, this action will clear the cravat.

If it is a very large cravat and the above options have not worked then a full stall is another option. This should not be attempted unless you have been taught how to do it and can only be done with a large amount of altitude. Remember if the rotation is accelerating and you are unable to control it, you should throw your reserve parachute whilst you still have enough altitude.

### Deep Stall / Parachutal Stall

It is possible for gliders to enter a state of parachutal stall. This can be caused by several situations including; a very slow release from a B-line stall; flying the glider when wet; or after a front/symmetric deflation. The glider often looks as though it has recovered properly but carries on descending vertically without full forward motion. This situation is called 'deep stall' or 'parachutal stall'.

It is unlikely to happen on any Ozone glider, but should it do so your first reaction should be to fully raise both hands. This normally allows the glider to return to normal flight but if nothing happens after a few seconds, reach up and push the A-risers forwards or apply the speed bar to encourage the wing to regain normal flight. Ensure the glider has returned to normal flight (check your airspeed) before you use the brakes again.

Do not fly in rain, doing so significantly increases the likelihood of parachutal stalls occurring. To reduce the chance of stalling in rain avoid using deep brake movements or Big Ears. Find a safe area to land and using the speed bar, maintain a good airspeed at all times.

**IMPORTANT**  
**A bad preparation on launch, aerobatic flying, flying a wing of too high a level or in conditions too strong for your ability are the main causes of cravats.**

**IMPORTANT**  
**Only a few cms of input from your brakes can maintain your wing in the stall. Always release your wraps if you have taken them!**

**IMPORTANT**  
**Never fly in the rain or with a wet glider**

## CARE AND MAINTENANCE

### Packing

To prolong the life of your wing and to keep the plastic reinforcements in the best possible condition it is very important to pack the wing carefully.

Ozone recommends to use the concertina packing method exactly as shown so that all of the cells rest alongside each other and the plastic reinforcements are not unnecessarily bent. Using an Ozone Saucisse or Saucisse light pack will help preserve the life of the wing and aid with the speed and ease of packing.

**Step 1.** Lay mushroomed wing on the ground. It is best to start from the mushroomed position as this reduces the dragging of the leading edge across the ground.



**Step 2.** Group the Leading Edge (LE) reinforcements with the A tabs aligned. Make sure the plastic reinforcements lay side by side.



**Step 3.** Lay wing on its side and strap the LE. Note the glider is NOT folded in half, it is folded with a complete concertina from tip to tip. It is really important to not stress the middle cell or bend the plastics too tightly.



**Step 4.** Group together the middle/trailing edge of the wing by sorting the folds near the B, C and D tabs.



**Step 5.** Once the LE and rear of the wing have been sorted, turn the whole wing on its side.

If using a Saucisse pack go to Step 8.

**Step 6.** Fold the wing with 3 or 4 folds whilst being careful to not crush the LE.



**Step 7.** Now place the folded wing into the stuff sack.



**Step 8.** If using a Saucisse, with the wing laid on its side carefully close the zip (or clips) without trapping any material.



**Step 9.** Make the first fold just after the LE reinforcements. Do not fold the plastic reinforcements, use 3 or 4 folds around the LE.



**IMPORTANT:** Do NOT lay the wing flat on the ground before packing the glider, this will cause abrasion damage to the top surface as you pull the glider towards the middle. ALWAYS pack from a mushroom or lift the wing off the ground when gathering the wing and grouping the leading edge.



**IMPORTANT:** Do not fold the glider in the centre, you will bend the plastics, instead pack the wing with a full concertina method from tip to tip before packing into the stuff sac.



### **Caring Tips**

- DO NOT drag your wing along the ground to another take-off position - this damages the sailcloth. Lift it up and carry it.
- DO NOT try to open your wing in strong winds without untangling the lines first - this puts unnecessary strain on the lines.
- DO NOT walk on the wing or lines.
- DO NOT repeatedly inflate the glider and then allow it to crash back down. Try to keep this movement as smooth as possible by moving towards the glider as it comes down.
- DO NOT slam your glider down on the ground leading edge first! This impact puts great strain on the wing and stitching and can even explode cells.
- FLYING in salty air, in areas with abrasive surfaces (sand, rocks etc.) and ground handling in strong winds will accelerate the aging process.
- DO NOT fly in the rain or expose the wing to moisture.
- DO NOT expose the wing to unnecessary UV. Pack away once you have finished flying. Do not leave it sitting in the sun.
- If you fly with a wrap, you should regularly undo the twisting that appears on the main brake lines. By twisting the line become shorter and you can end up with a constant tension on the trailing edge (which can lead to problem on launch, stalling, glider not flying symmetrically, ...)
- Change your main brake lines if they are damaged.
- Be careful when groundhandling to not saw the brake lines against the risers or main lines. The abrasion caused by a sawing motion can damage the main lines and lead to premature ageing of the risers. If you notice any signs of abrasion, especially to the lines, make sure you get the wing professionally serviced and importantly modify your groundhandling technique to stop any further damage.
- Your Ozone wing has an opening closed using Velcro on the trailing edge of the tip called the 'Butt hole'. This has been designed to easily empty all the things which have been accumulating in your wing (sand, leaves, rocks, mobile phones etc).
- It is recommended that you regularly CHECK your wing, especially after a heavy period of use, after an incident or after a long period of storage.

### **Storage and Transport**

Always store all your flying equipment in a dry room, protected from direct heat and sunlight. Your wing should be dry before being packed away. Moisture, heat and humidity are the worst elements for damaging your glider. Storing a damp glider in your car under the sun would be terrible for example.

If you land in salt water, you must first rinse it thoroughly with clean fresh water. Dry the wing completely, preferably out of the sun, in the wind. Never use a hair dryer, etc.

Take care that no insects get packed away with the wing. They may eat the cloth and make holes in a bid to escape. They can also leave acidic deposits if they die and decompose.

Transport the wing in the supplied bags and keep away from oils, paints, chemicals, detergents etc.

### **Cleaning**

Any kind of wiping/scratching can damage the coating of the cloth. We recommend to not clean the wing, but if you do have to, use a soft cloth dampened with a small amount of water and use gentle movements little by little across the surface.

### **Wing Repairs**

Always let a registered dealer, professional repair centre or the manufacturer carry out any major or complex repairs, especially those near seam margins.

#### **If you damage the sail:**

If the rip is small and in the middle of a panel however you can fix it yourself. You'll find all the materials in the repair kit you need. The fabric can be simply mended with the sticky rip stop/spinnaker tape. When cutting out the patches allow ample overlap of the tear and make sure both sides are different sizes. Make sure to round off each corner of the patches.

You can find more information about repairing your wing on the Ozone website, including step by step instructions with pictures.

**If you damage a line:**

Any line that is visually damaged MUST be replaced. Use a reputable paragliding service centre to make the replacement lines. Alternatively you can order them from your local Ozone dealer or directly from our website <http://www.flyozone.com/paragliders/en/shop/lines.php>

It is important that replacement lines are made from the correct materials and diameters. You should check lengths against their counterpart on the other side of the wing to make ensure symmetry. Once the line has been replaced, inflate and check the glider before flying.

** Maintenance Checks**

Your wing, like a car, should be technically checked to ensure proper airworthiness. Your wing should be checked by a qualified professional for the first time after 24 months, or after 100 hours. However, if you are a frequent flyer (more than 100 hrs per year), then we recommend, that you get your glider checked annually. The checker should inform you about the condition of your glider and if some parts will need to be checked or changed before the next normal service check period.

The sail and the lines do not age in the same way or at the same rate; it is possible that you may have to change part or all of the lines during the wing's life. For this reason it is important to do regular inspections so that you know the exact condition of all of the components of your glider. We recommend that inspections are carried out by a qualified professional.

You alone are responsible for your flying kit and your safety depends on it. Take care of your equipment and have it regularly inspected. Changes in inflation/groundhandling/flying behaviour indicates the gliders aging, if you notice any changes you should have the wing checked before flying again. These are the basic elements of the check up (full details and permissible figures can be found on our website): Porosity is measured with a porosity meter, the time taken by a certain volume of air to go through a certain surface of the cloth. The time in seconds is the result. A measurement is done in a several places on the top surface along the span of the glider behind the leading edge.

**IMPORTANT**  
**Take care of your glider and make sure you have it checked and serviced according to the schedule.**

**The tearing resistance of the cloth** - A non-destructive test following the TS-108 standard which specifies minimum tear strength for sky diving canopies should be made using a Bettsometer. (B.M.A.A. Approved Patent No. GB 2270768 Clive Betts Sails)

**Strength of the lines** - An upper, middle and lower A line, along with a lower B and a lower C (and lower D if applicable) line should be tested for strength. Each line is tested to breaking point and the value recorded. The minimum value is 14g for all lower A+B+C lines, calculated from the maximum certified flying weight of the glider. The added minimum strength for the middle lines and upper lines should be the same value. If the breaking strength is close to the minimum value calculated, the professional should give a period after which the strength test should be performed again.

**Lengths of the lines** - The overall length (riser lines + mid lines + upper lines) has to be checked under 5Kgs of tension. The difference between the measured length and the original length should not exceed +/- 10mm. Please note, during measurement the risers need to be blocked in position to avoid any rotation. Failure to do so may effect the measured lengths of the C and D lines.

Compliance of the test sample's suspension lines, brake lines and risers were checked by the testing laboratory after the test flights were completed.

**Risers** - Visual inspection for signs of wear or abrasion. Differences to manual lengths should not exceed +/-5mm.

**Canopy check** - A full visual check should be carried out: All the components of the wing (stitching, ribs, diagonals, lines, tabs, ...) should be checked for signs of deterioration.

Finally, a **flight test** to confirm that the wing behaves normally should be carried out by a professional.

** Modifications**

Your Ozone Wisp was designed and trimmed to give the optimum balance of performance, handling and safety. Any modification means the glider loses its certification and will also probably be more difficult to fly. For these reasons, we strongly recommend that you do not modify your glider in any way.

## OZONE QUALITY GUARANTEE

At Ozone we take the quality of our products very seriously, all our gliders are made to the highest standards in our own manufacturing facility. Every glider manufactured goes through a stringent series of quality control procedures and all the components used to build your glider are traceable. We always welcome customer feedback and are committed to customer service. Ozone guarantees all of its products against manufacturer's defects or faults. Ozone will repair or replace any defective product free of charge. Ozone and its distributors provide the highest quality service and repair, any damage to products due to wear and tear will be repaired at a reasonable charge.

If you are unable to contact your dealer then you can contact us directly at [info@flyozone.com](mailto:info@flyozone.com).

### Summary

Safety is paramount in our sport. To be safe, we must be trained, practised and alert to the dangers around us. To achieve this we must fly as regularly as we can, ground handle as much as possible and take a continuous interest in the weather. If you are lacking in any of these areas you will be exposing yourself to more danger than is necessary.

Every year many pilots get hurt launching; don't be one of them. Launching is the time that you are most exposed to danger so practice it lots. Some launch sites are small and difficult and conditions aren't always perfect. If you're good at ground handling you'll be able to confidently and safely launch whilst others struggle...practice as much as you can. You'll be less likely to get hurt and more likely to have a great day's flying.

Respect the environment and look after your flying sites.

If you need to dispose the wing, do so in an environmentally responsible manner. Do not dispose of it with the normal household waste.

Finally, RESPECT the weather, it has more power than you can ever imagine. Understand what conditions are right for your level of flying and stay within that window.



Happy flying & enjoy your Wisp.  
Team Ozone

## TECHNICAL SPECIFICATIONS

	<b>38</b>
No. of Cells	40
Projected Area (m <sup>2</sup> )	32.1
Flat Area (m <sup>2</sup> )	37.8
Projected Span (m)	10.6
Flat Span (m)	13.6
Projected Aspect Ratio	3.5
Flat Aspect Ratio	4.9
Root Chord (m)	3.56
Weight (kg)*	4.33 / 4.70
Control Travel at max weight (cm)	75
Certified Weight Range (kg)	110 -180
Certification EN/LTF	B

\*Lightweight / Standard risers

# TECHNICAL DRAWINGS

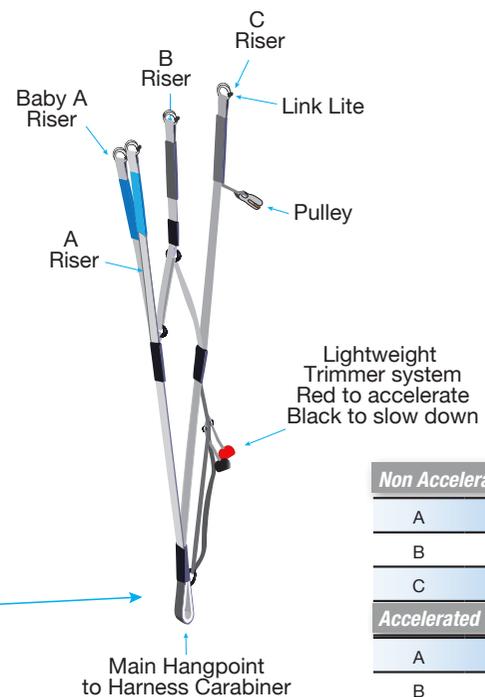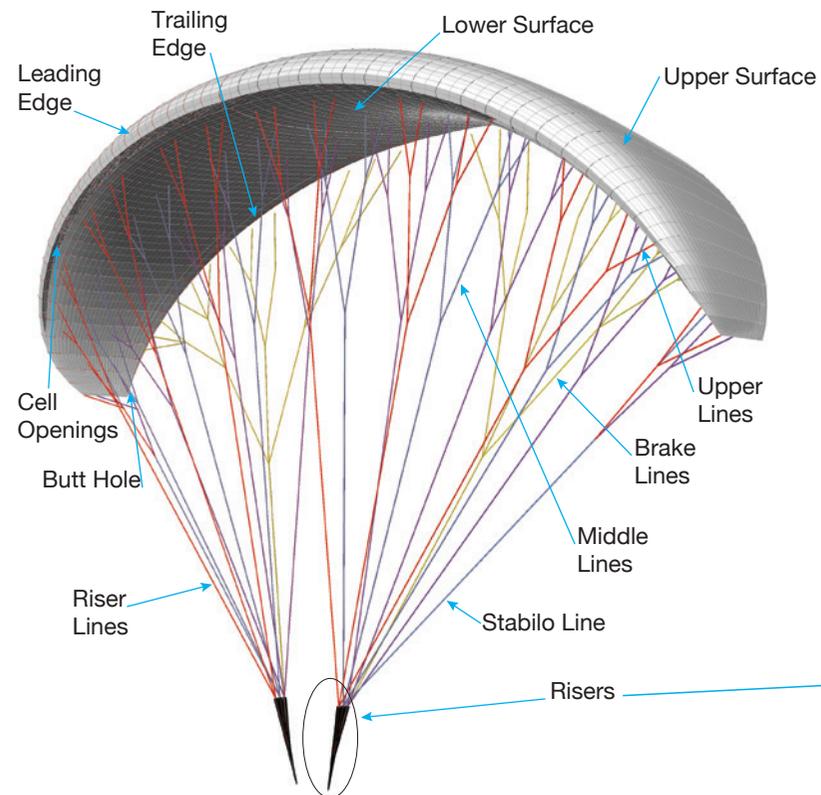


Lightweight Trimmer system  
Red to accelerate  
Black to slow down

Non Accelerated trims pulled	
A	400mm
B	383mm
C	350mm
Accelerated trims released	
A	400mm
B	433mm
C	500mm

# LINE DIAGRAM

Individual and linked line lengths can be found online.

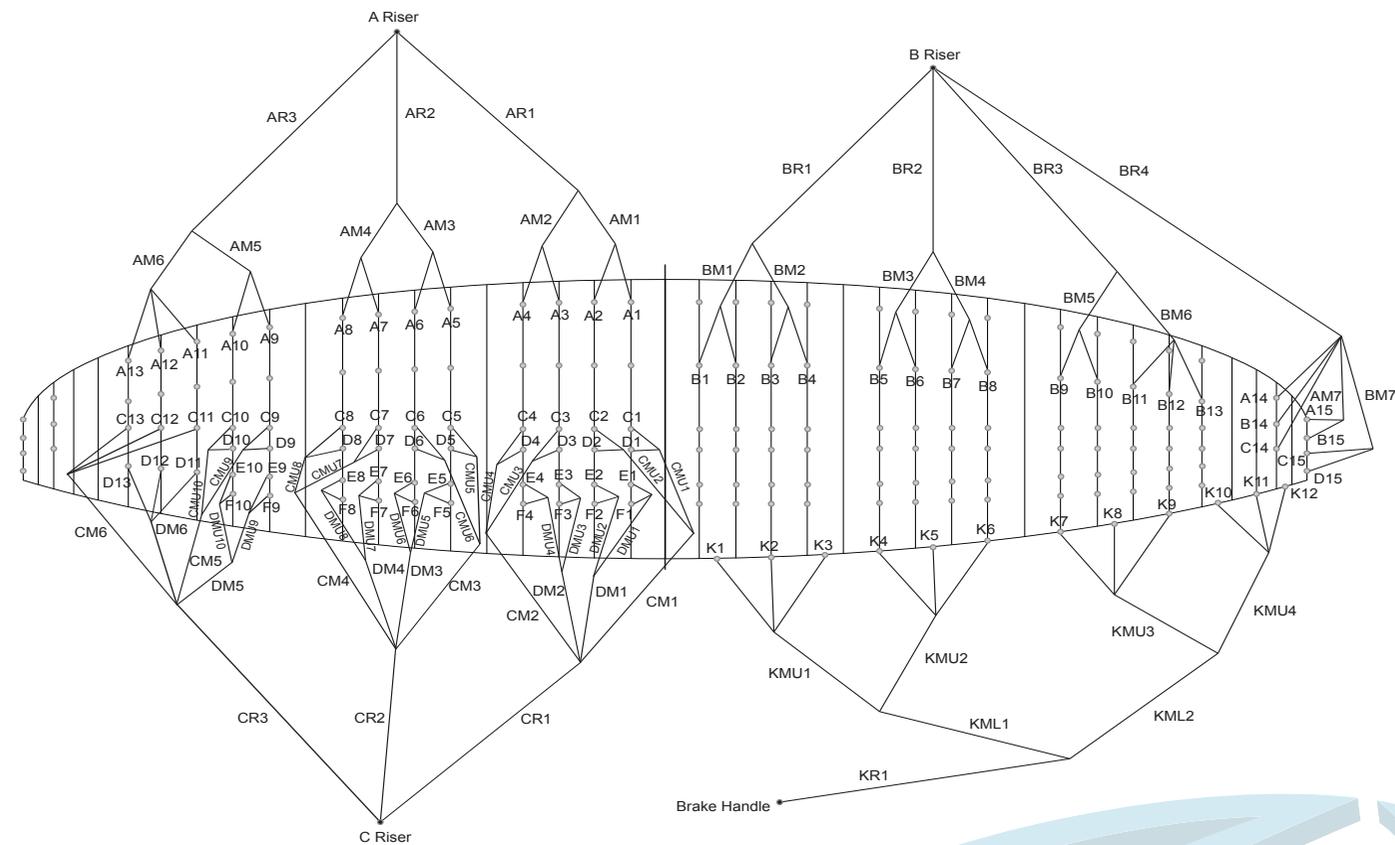


## LINK LITES


Your wing uses lightweight Amsteel Dyneema Link Lite connectors, they replace standard maillons and have a breaking load in excess of 1000kgs. To avoid disappointment, injury or death, when changing lines it is vitally important to connect the Link Lites correctly.

Please follow these instructions carefully, if you have ANY doubts please consult with your Ozone dealer.

### Removal

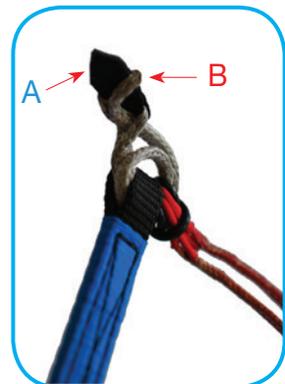

First loosen the **B** loop before feeding the **A** tab through the **B** loop.

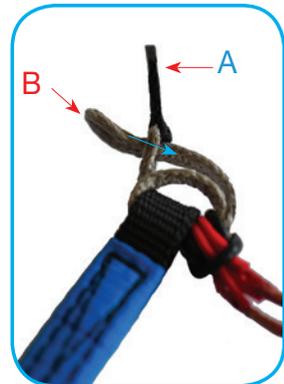

Pull the **B** loop through the **A** loop, the lines and the rubber ring.



Continue pulling the **B** loop through the risers/lines/ring for the second turn.

Re-attaching the Link Lite is the reverse of the above procedure.

### Replacement



Ensure the lines are in the correct order and not overlapped, then install the rubber ring as shown.




The loops of the lines must come back through the rubber ring as shown.




At this stage, make sure the lines and rubber ring are seated neatly on the Link Lites with no twists or overlapping loops.




Close the Link Lites by feeding the **B** loop through the **A** loop before passing the **A** tab through the **B** loop.

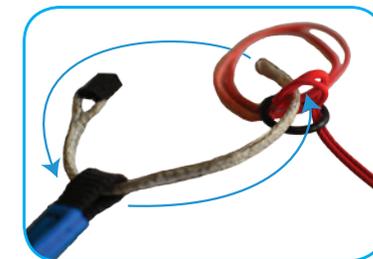

Feed the **B** loop through the riser, then through the line loops, passing behind the lines before going through the riser for the second time. Tension the Link Lite so it is approximately the correct dimension, the **A** tab should be close to the risers.

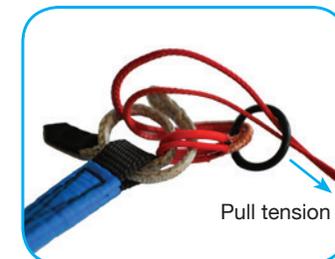

Feed the **B** loop through the line loops for the second time following the same path as before. Once the **B** loop is through the second time and in the correct position pull tension on the lines to force the rubber ring into the correct position.

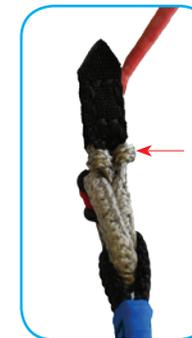

Double check the Link Lite is closed correctly, it should look exactly as shown.

**WARNING:** Incorrect mounting of the Link Lites will reduce the working strength and possibly cause complete failure resulting in serious injury or death. Ensure that they are mounted with **2 turns** and closed correctly.

## MATERIALS

All Ozone gliders are made from the highest quality materials available.

### **Cloth**

#### **Upper Surface**

Dominico DOKDO N20D MF / Porcher 7000 E71

#### **Lower Surface**

Porcher 7000 E71

#### **Internal Ribs**

Porcher 7000 E91

#### **Leading Edge Reinforcement**

2.5/1.8mm Plastic pipe

### **MainLine Set**

#### **Riser Lines**

Edelrid 8000U-360/230/190Kg

#### **Middle Lines**

Edelrid 8000U-230/190/130/90kg

#### **Upper Lines**

Edelrid 8000U-130/90/70/50kg

### **Risers and hardware**

#### **Maillons**

Link Lites

#### **Riser webbing**

12mm zero stretch polyester webbing

7mm Dyneema



1258 Route de Grasse  
Le Bar sur Loup  
06620  
France

*Inspired by Nature, Driven by the Elements*

[WWW.FLYOZONE.COM](http://WWW.FLYOZONE.COM)